


Portable Monitor With Ball Valve

The Task Force Tips' Blitz Lite is an innovative, lightweight, and highly versatile attack monitor. This portable monitor is the most compact in the market when stored together with its standard TFT nozzle. It can go anywhere a handline goes while delivering much more water. With its shutoff ball valve fully open, its smooth open waterway produces low friction loss of about 9 psi at 500 gpm. The Blitz Lite's discharge pivot, that comes with factory installed removable stream-straightener, makes directing the superior stream extremely quick and effortless. A safety anchor strap, which ships with a wind-up reel that tucks away neatly under the monitor, is included for safe operation on slick surfaces like marble floors. The main body is hardcoat anodized aluminum with a blue TFT powder coat finish inside and out.


XXL111A
\$2450.00
 15.4 lb (6.9kg)

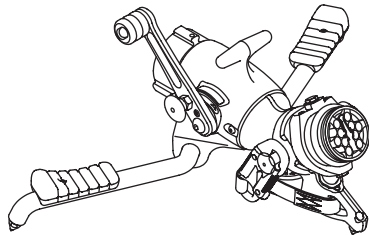

XXL111A BLITZ LITE MONITOR Flow range up to 500 gpm (2000 l/min). The monitor features low friction outlet pivot. Elevation is adjustable between 30 to 60 degrees unmanned, and down to 20 degrees when manned. Horizontal rotation is manually adjustable 20 degrees either side of center. When the legs are folded or unfolded, the new drag mechanism in the legs provide added resistance so they stay in position. The heavy-duty carbide tipped legs are easily folded out to a wide deployed stance. Stowed in storage bracket overall size is 19.2"L x 9.1"W x 11.9"H (48.7 x 23.1 x 30.2cm). Standard inlet is 2.5"NH (65mm) rocker lug swivel coupling. Standard outlet is 2.5"NH (65mm) rigid male threads.


Anchor Strap Included

XXL-B
\$161.00
 2.8 lb (1.3kg)



XXL-B STORAGE BRACKET BLITZ LITE This stainless steel and engineered polymer storage bracket can be mounted for easy and rapid deployment of a pre-connected Blitz Lite. Mount on any accessible vertical or horizontal surface. Comes complete with mounting screws. 15.0"L x 8.25"W x 3.1"H (38.1 x 20.9 x 7.8 cm)


MST-3NJ
\$375.00
 2.3 lb (1.0kg)
 11.8" (3.0cm)



MST-3NJ 3 STACKED TIPS Hardcoat anodized aluminum alloy for maximum corrosion protection. Flow charts for each tip are lasered. Tip sizes are 1.5", 1.25", and 1.0" (38, 32 and 25mm) diameter. Small tips may be removed for break and extend operations with a 1.5" NH (38mm) hose thread. Standard swivel inlet is 2.5" NH (65mm).

BLITZ LITE™ PACKAGE

XXLC-32
\$3100.00

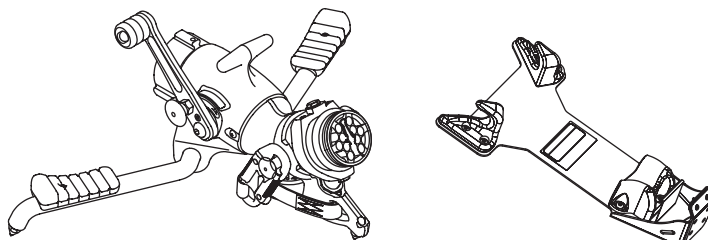

XXLC-32 PACKAGE CONTAINS:
 BLITZ LITE MONITOR (Specify Inlet & Outlet)
 STORAGE BRACKET (BLITZ LITE)
 MAX-LITE TIP (Specify Inlet & Model)


SAVE Up to \$410 in package over separate purchase

Choose one option from each category. For example Model ZN 1 2 A is 2.5" NH Female thread, 500 gpm at 100 psi nozzle. For assistance in ordering, please call 1-800-348-2686 and speak to a nozzle specialist.

MAX-LITE
ZNA**

ZN

A



See page 58
 for description

THREADS (Rigid)	FLOW
1) 2.5"-7.5 TPI NH FEMALE 2) 2.5"-11 TPI BSP FEMALE 3) 2.5"-11.5 TPI NPSH FEMALE 4) 2.5" CODE-AT (CSA)	2) 500 GPM AT 100 PSI — Kfactor = 50 (2000 l/min @ 7 bar)
2.5" = 65mm	