


# 1" (25mm) QUADRAFOG® SERIES

5 - 40 GPM (20 - 150 l/min)

Selectable Gallonage


The 5-40 gpm QuadraFog is an excellent choice for any 1" hose line. With its optional colored pistol grip, the compact QuadraFog is an economical and lightweight, selectable gallonage, combination pattern nozzle. The uniquely cut fixed metal fog teeth produce a wide range of patterns from straight stream to narrow fog to extremely wide fog. This series accepts either the FJ-DQ low-expansion or the FJ-MX-DQ FOAMJET multi-expansion aspirating attachments. Metric calibrations available: 20-40-100-150 l/min @ 7 bar – consult factory for model numbers.

**DQ40**  
**DQ40-ID**  
 1.3 lb. (0.6kg)  
 5" (12.7cm)




**DQ40 QUADRAFOG TIP 1" NH** - Selectable gallonage nozzle with four flow settings of 5, 10, 24, and 40 gpm @ 100 psi (20-40-100-150 l/min @ 7 bar). All lightweight materials, hardcoat anodized aluminum. Flush without shutting down. This tip-only design has an "off" position for break-and-extend operations. 1" NH rigid thread is standard. **-ID = 1.0" NPSH Threads**

**DQS40**  
**DQS40-ID**  
 2.0 lb. (0.9kg)  
 7-1/4" (18.4cm)



**DQS40 QUADRAFOG NOZZLE 1" NH** - Selectable gallonage nozzle with four flow settings of 5, 10, 24, and 40 gpm @ 100 psi (20-40-100-150 l/min @ 7 bar). All lightweight materials, hardcoat anodized aluminum. Flush without shutting down. Quick-change rear valve seat and stainless steel shut-off ball. Rocker lug 1" NH swivel is standard. **-ID = 1.0" NPSH Threads**

**DQS40P**  
**DQS40P-ID**  
 2.3 lb. (1.0kg)  
 7-1/4" (18.4cm)

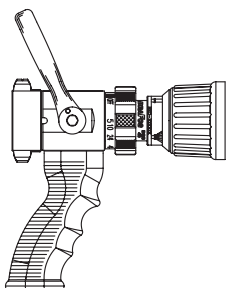

**DQS40P QUADRAFOG W/GRIP 1" NH** - Selectable gallonage nozzle with four flow settings of 5, 10, 24, and 40 gpm @ 100 psi (20-40-100-150 l/min @ 7 bar). All lightweight materials, hardcoat anodized aluminum. Flush without shutting down. Quick-change rear valve seat and stainless steel shut-off ball. Pistol grip is mounted below the valve. Rocker lug 1" NH swivel is standard. **-ID = 1.0" NPSH Threads**

# 1.5" (38mm) QUADRAFOG® SERIES


30 - 125 GPM (110 -470 l/min)

Selectable Gallonage

The 30-125 gpm QuadraFog is designed for 1-1/2" hose lines. The compact QuadraFog is a rugged and dependable, NFPA compliant, selectable gallonage nozzle. Available in either tip-only configuration, or with a stainless ball shutoff, the QuadraFog is also available with an optional colored pistol grip. All 1-1/2" QuadraFogs accept either the FJ-LX-FQ FOAMJET low-expansion or the FJ-MX-FQ FOAMJET multi-expansion foam aspiration attachments and come with your choice of Fixed (F) or stainless steel Spinning (S) fog teeth. Metric calibrations available: 110-230-360-470 l/min @ 7bar – consult factory for model numbers.

**Model# Suffix: F = Fixed Teeth S = Spinning Teeth L = Low Pressure -IF = NPSH Threads.**

**FQ125F**  
**FQ125S**  
**FQ125LF**  
**FQ125LS**




**FQ125 QUADRAFOG TIP 1.5" NH** - Selectable gallonage nozzle with four flow settings of 30, 60, 95, and 125 gpm @ 100 psi (110-230-360-470 l/min @ 7bar). All lightweight materials, hardcoat anodized aluminum. Flush without shutting down. This tip-only design has an "off" position for break-and-extend operations. 1.5" NH rigid thread is standard.

2.4 lb. (1.1kg)  
 6-7/8" (17.5cm)



**FQ125L - LOW PRESSURE VERSION.** Same as FQ125 above, but operates at a lower pressure of 75 psi (5 bar). **-IF = 1.5" NPSH Threads**

**FQS125F**  
**FQS125S**  
**FQS125LF**  
**FQS125LS**

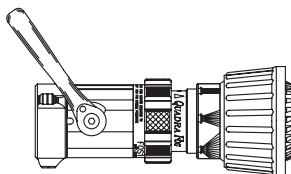


**FQS125 QUADRAFOG NOZZLE 1.5" NH** - Selectable gallonage nozzle with four flow settings of 30, 60, 95, and 125 gpm @ 100 psi (110-230-360-470 l/min @ 7bar). All lightweight materials, hardcoat anodized aluminum. Flush without shutting down. Quick-change rear valve seat and stainless steel shut-off ball. Rocker lug 1.5" NH swivel is standard.

3.4 lb. (1.5kg)  
 8-3/8" (21.3cm)



**FQS125L - LOW PRESSURE VERSION.** Same as FQS125 above, but operates at a lower pressure of 75 psi (5 bar). **-IF = 1.5" NPSH Threads**

**FQS125PF**  
**FQS125PS**  
**FQS125LPF**  
**FQS125LPS**

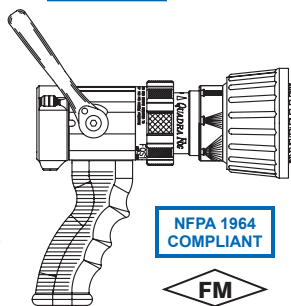

**FQS125P QUADRAFOG W/GRIP 1.5" NH** - Selectable gallonage nozzle with four flow settings of 30, 60, 95, and 125 gpm @ 100 psi (110-230-360-470 l/min @ 7bar). All lightweight materials, hardcoat anodized aluminum. Flush without shutting down. Quick-change rear valve seat and stainless steel shut-off ball. Pistol grip is mounted below the valve. Rocker lug 1.5" NH swivel is standard.



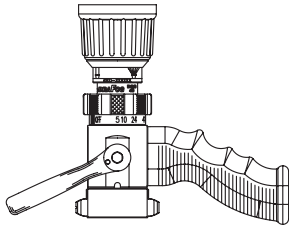
3.6 lb. (1.6kg)  
 8-3/8" (21.3cm)



**FQS125LP - LOW PRESSURE VERSION.** Same as FQS125P above, but operates at a lower pressure of 75 psi (5 bar). **-IF = 1.5" NPSH Threads**


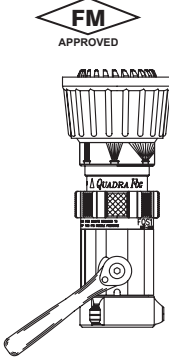
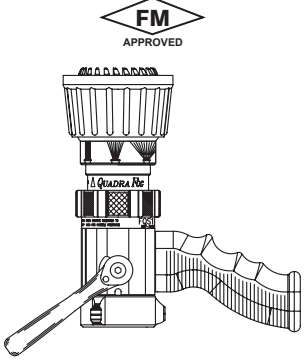
1" (25mm) QUADRAFOG® SERIES  
5, 10, 24 & 40 GPM (20, 40, 100 & 150 l/min)

FoamJet Models for  
1" QuadraFog Series  
FJ-DQ & FJ-MX-DQ

<b>Selectable Gallonage 1" Nozzles</b>	 <p>Nozzle Tip Only</p>	 <p>Nozzle w/Shutoff</p>	 <p>Nozzle w/Shutoff &amp; Pistol Grip</p>	
	100 psi NH Threads Fixed Teeth	DQ40	DQS40	DQS40P
	100 psi NPSH Threads Fixed Teeth	DQ40-ID	DQS40-ID	DQS40P-ID

1.5" (38mm) QUADRAFOG® SERIES  
30, 60, 95 & 125 GPM (110, 230, 360 & 470 l/min)

FoamJet Models for  
1.5" QuadraFog Series  
FJ-LX-FQ, FJ-MX-FQ

<b>Selectable Gallonage 1.5" Nozzles</b>  <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: 10px auto;">                     NFPA 1964 COMPLIANT                 </div>	 <p>Nozzle Tip Only</p>	 <p>Nozzle w/Shutoff</p>	 <p>Nozzle w/Shutoff &amp; Pistol Grip</p>	
	100 psi NH Threads Fixed Teeth	FQ125F	FQS125F	FQS125PF
	100 psi NPSH Threads Fixed Teeth	FQ125F-IF	FQS125F-IF	FQS125PF-IF
	75 psi NH Threads Fixed Teeth	FQ125LF	FQS125LF	FQS125LPF
	75 psi NPSH Threads Fixed Teeth	FQ125LF-IF	FQS125LF-IF	FQS125LPF-IF
	100 psi NH Threads Spinning Teeth	FQ125S	FQS125S	FQS125PS
	100 psi NPSH Threads Spinning Teeth	FQ125S-IF	FQS125S-IF	FQS125PS-IF
	75 psi NH Threads Spinning Teeth	FQ125LS	FQS125LS	FQS125LPS
	75 psi NPSH Threads Spinning Teeth	FQ125LS-IF	FQS125LS-IF	FQS125LPS-IF